

50T&150T Series Single Pump Ordering Code

50 T - 12 - F - R R - 01

Series Number (型号)

50T-
150T-

Piping Mounting (管口形式)

T: Piping Type (管径牙口)
F: Flange Type (法兰型)

Capacity Mark : (ml/rev) (排量)

50T: 09, 12, 14, 17, 19, 21,
23, 26, 30, 36, 40

150T: 48, 61, 75, 94, 116, 125

Flange Type (安装方式)

L: Foot Type (脚座型)
F: Flange Type (法兰型)

Shaft Type (心轴种类)

01: No.01 Shaft
02: No.02 Shaft

Discharge Port Position (出口位置)
(Viewed From Shaft End)

R: On Right Hand (右)
L: On Left Hand (normal) (左)

Shaft Rotation (心轴转向)
(Viewed From Shaft End)



R: Clockwise (顺时针)
L: Anti-Clockwise (逆时针)

Model		Delivery Flow (ℓ/min) at no-load pressure				Running Speed (rpm)		Weight(Kg)		Max Pressure (Kg/cm ²)
		Running Speed(rpm)				Max	Min	Foot Type	Flange Type	
		1000	1200	1500	1800					
50T	09	—	10.8	13.5	16.2	1800	950	10	9.5	105
	12	12.0	14.4	18.0	21.6	1800	950	10	9.5	105
	14	14.6	17.5	21.7	26.1	1800	950	10	9.5	105
	17	17.0	20.3	25.5	31.5	1800	950	10	9.5	105
	19	19.2	23.0	28.8	34.6	1800	950	10	9.5	105
	21	21.1	25.3	31.7	38.0	1800	950	10	9.5	105
	23	23.0	27.6	34.5	41.4	1800	950	10	9.5	105
	26	26.2	31.4	39.3	47.2	1800	950	10	9.5	105
	30	30.1	36.1	45.2	54.0	1800	950	10	9.5	105
	36	36.2	43.4	54.3	—	1500	950	10	9.5	70
150T	40	41.5	49.8	—	—	1200	950	10	9.5	70
	48	48.3	57.9	72.4	86.9	1800	900	24	24	90
	61	61.5	73.8	92.2	110.7	1800	900	24	24	90
	75	75.2	90.6	113.2	135.9	1500	900	24	24	90
	94	94.2	113.0	141.3	—	1500	900	24	24	70
	116	116.3	139.6	—	—	1200	900	24	24	70
	125	125.3	150.4	—	—	1200	900	24	24	70

50T&150T Series Single Pump Dimensional Drawing



50T Foot Type

	A	B	C	D	E
NO.01-Shaft	Ø19.05	36.0	4.76	21.3	31.75
NO.02-Shaft	Ø22.0	46.0	5.0	24.0	30.0

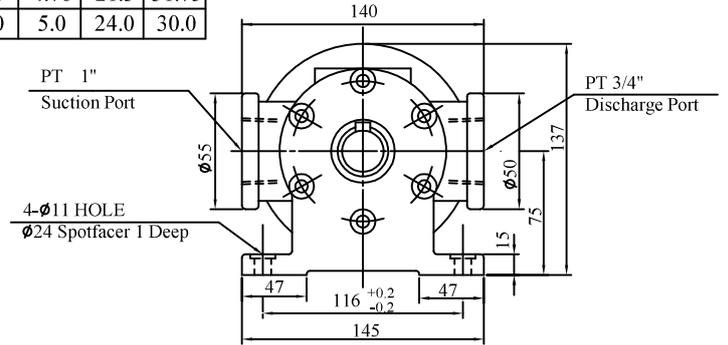
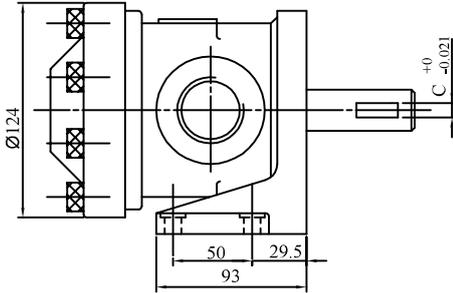


50T Flange Type

	A	B	C	D	E	F
NO.01-Shaft	Ø19.05	36.0	4.76	21.3	31.75	Ø95.02
NO.02-Shaft	Ø22.0	46.0	5.0	24.0	30.0	Ø96.02

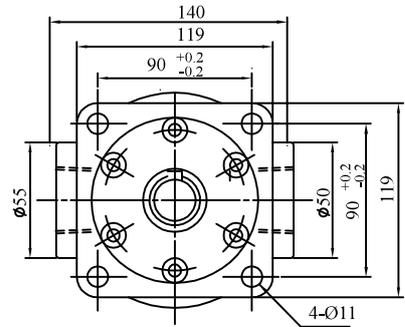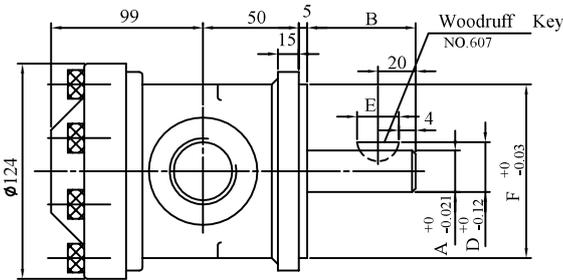

150T Foot Type

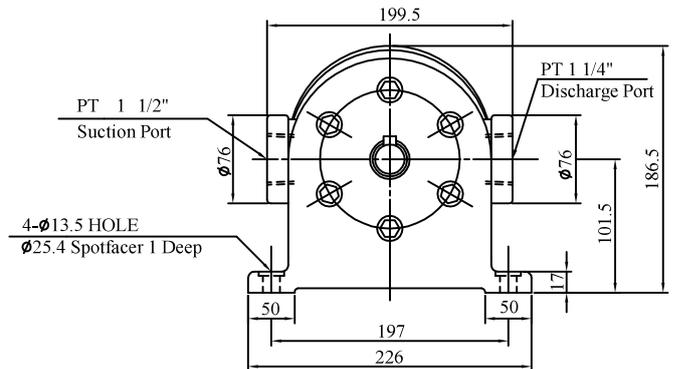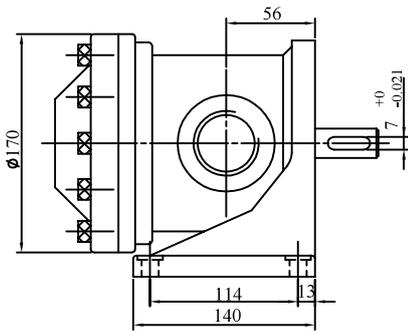

150T Flange Type

